
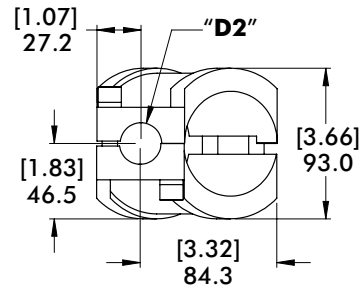
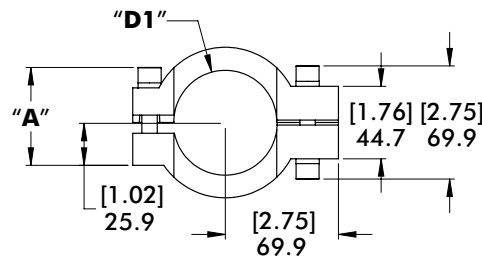
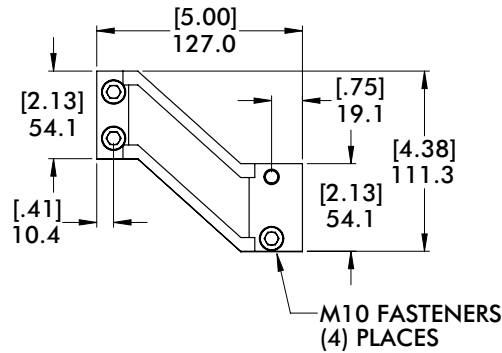


OFFSET WRIST BRACKETS AND BLOCKS

Round Tooling | Dimensions | Technical Specifications

Nominal (Ø) given
See chart on Page 72
for actual (Ø) size

SEC/SLK Ø60mm/2.50" to Ø25mm/1.00" Wrist Bracket

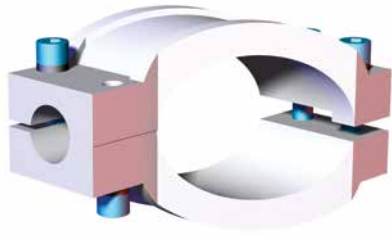

Specifications:

Max. Static Clamp Load:

Ø25mm/1.00":

149 N*m [110 ft-lb]





Ø60mm/2.50":

677 N*m [500 ft-lb]

Material: Aluminum

Model Number	(Ø)"D1"	(Ø)"D2"	"A"	Weight
CPI-SLK-6025	60mm	25mm	[2.25] 57.1	[1.72 lb] .78 kg
CPI-SEC-2510	2.50"(in)	1.00"(in)	[2.38] 60.5	[1.61 lb] .73 kg

SEC Ø2.50" to Ø1.50" Wrist Bracket

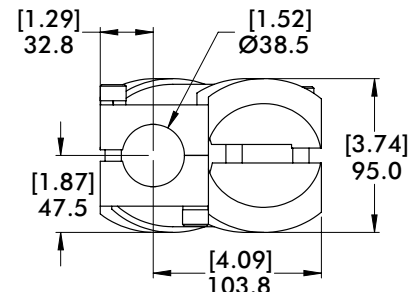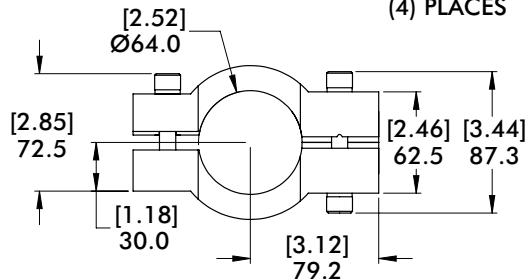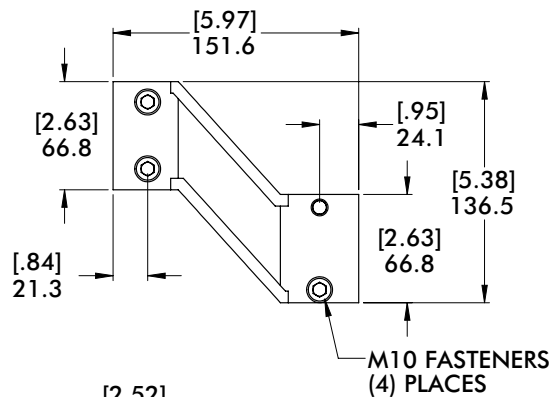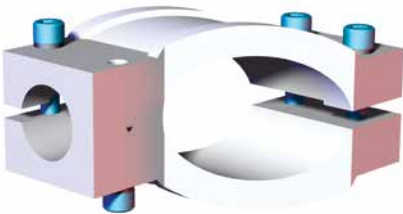

Specifications:

Max. Static Clamp Load:

Ø40mm/1.50":

271 N*m [200 ft-lb]

Ø60mm/2.50":

677 N*m [500 ft-lb]

Material: Aluminum

Model Number	Weight
CPI-SEC-2515	[2.72 lb] 1.23 kg